


Océ Specifications

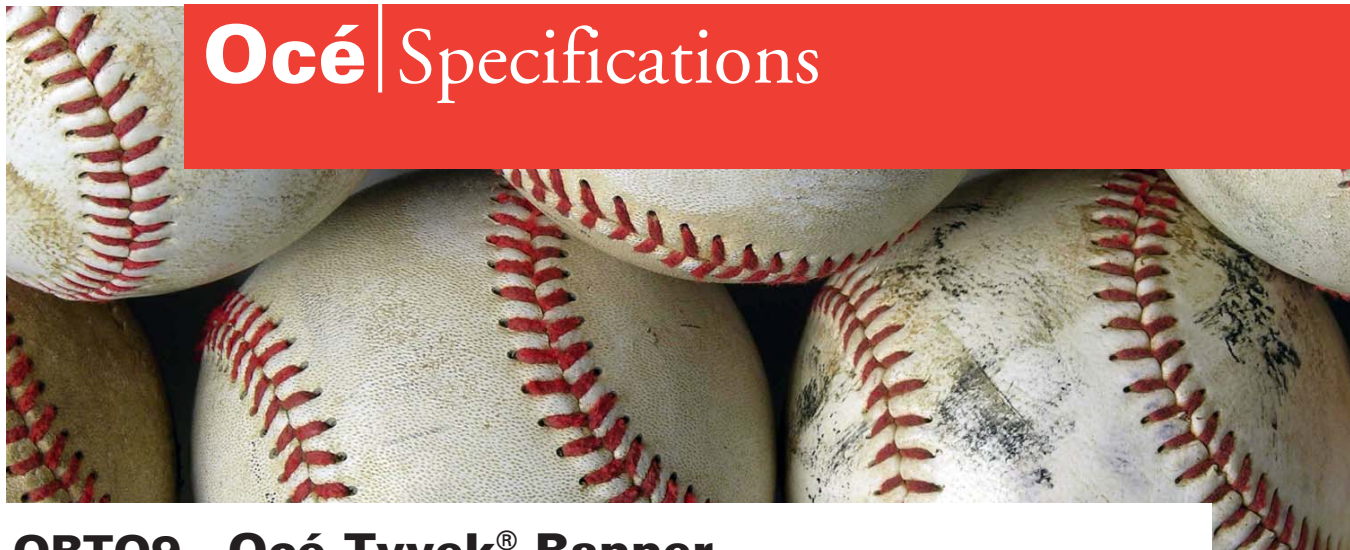

OBTO9 - Océ Tyvek® Banner

Product Description	9 mil extremely tear Tyvek® banner. OBTO9 is specially designed to provide maximum imaging performance and excellent outdoor durability.	
Physical Properties	Caliper: 9 mil nominal Opacity: 96% Whiteness: 114	Weight: 133 gsm / 4 oz/yd ² Brightness: 101 Flame Spread Class: A (ASTM E84)
Features	Outdoor Durable, Extreme Tear Resistance, Universal Compatibility, Can Easily Be Grommited and Sewn	
Available Sizes	Sample roll: 24" x 10' Rolls 100': 24", 36", 42", 50", 54", 60"	
Recommended Storage Conditions & Shelf Life	Temperature 68°-77°F. (20°-25°C). Relative Humidity 30-70%. Repack opened rolls when not in use. One year at conditions noted above. Allow material to stabilize to room conditions 24 hours before use.	
Environmental, Health & Safety	No Material Safety Data Sheet required. Waste not suited for recycling.	
Main Applications	Outdoor Signage, Hanging Banners, Tradeshow Displays, Portable Displays	
Finishing Tips	Pressure Sensitive or Heat Activated Lamination is Recommended.	
Print Longevity	Outdoor life expectancy without noticeable fading - up to 3 months Indoor life expectancy without noticeable fading - up to 6 months <small>*Based on accelerated age testing. Actual results may vary based on use.</small>	
Printer Ink/Compatibility	Océ OBTO9 is recommended for use with pigment ink in most of today's inkjet printers. Check for a complete compatibility chart on our website: www.oceusa.com/imagingsupplies	
Color Profiles	ICC Color profiles will improve image quality and optimize ink limits for improved drytime, wider color gamut, and more accurate color matching. Océ Imaging Supplies provides free profiles for the most common inkjet printer and RIP combinations: ICC profiles are available from the Océ web site: http://www.oceusa.com/imagingsupplies	

Océ Imaging Supplies

Product Info

Display Graphics
Aqueous
Media Line

Version 2
12-27-06

OBTO9 Outdoor Tyvek® Banner

Banner

