


Océ Specifications

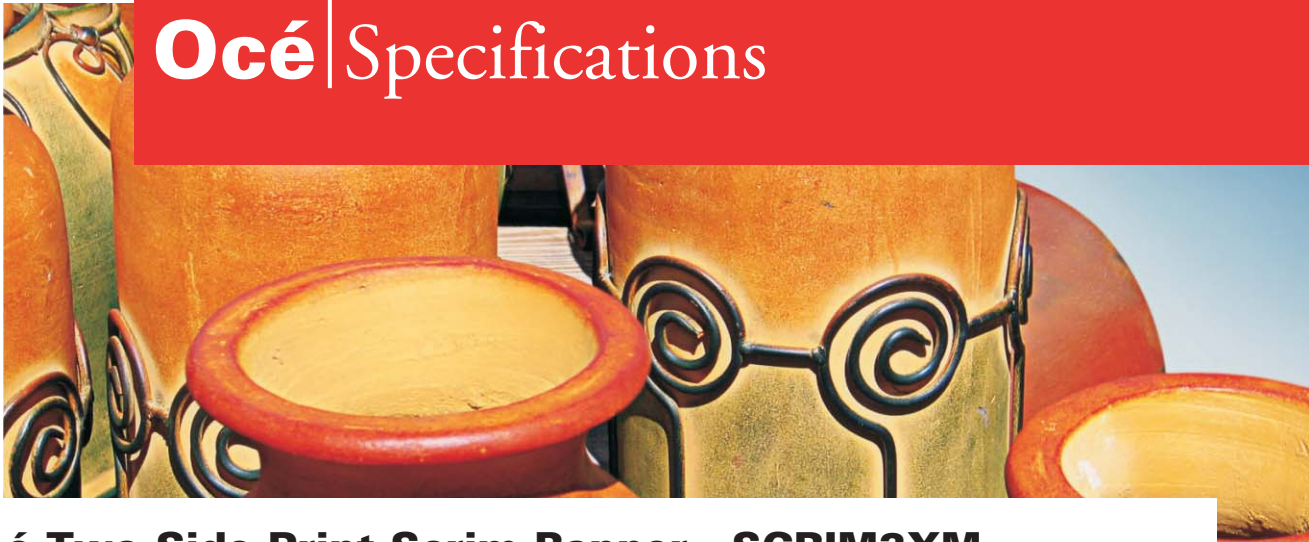

Océ Two Side Print Scrim Banner - SCRIM2XM

Product Description

SCRIM2XM is made with a smooth block-out layer fused between two printable layers of PVC vinyl. Both sides have a matte finish perfect when a non-glare application is needed. This product can be finished by sewing, grommets, or by using a banner tape. This product block-out scrim layer resists tearing, and curl. The matte finish provides for improved viewing without glare, excellent color gamut, and printability. Profiles are available at www.oceusa.com/imagingsupplies.

Océ Imaging Supplies Product Info

*Display Graphics
Solvent Media Line*

Physical Properties

Caliper	13 mil	Whiteness	85 (We)
Weight	13 oz per yard ²	Smoothness	80 (Sheffield Units)
Gloss	5 @ 60°	Opacity	100%

Two Side Print Scrim Banner

SCRIM2XM

Solvent Banner

Printer Ink/Compatibility

Océ SCRIM2X is recommended for use in most solvent ink jet printers including:

Océ® Low Solvent	Océ® Eco Solvent ULTRA
Mimaki® ES3, SS2, SS2-1, HS	Hewlett-Packard® ECO-SOL
Roland® Eco-Sol Max	Mutoh® Eco Solvent ULTRA

Available Sizes & Item Numbers

38" x 164' - SCRIM2XM38	54" x 164' - SCRIM2XM54
-------------------------	-------------------------

Recommended Storage Conditions & Shelf Life

Temperature 59°-86°F. (15°-30°C). Relative Humidity 30-70%.
Repack opened rolls when not in use.
One year maximum at conditions noted above.
Allow material to stabilize to room conditions 24 hours before use.

Finishing Tips

Grommets should be placed in the hemline along the length of the banner and should pierce through two layers of media. Corner grommets should be placed where the length hem and the width hem meet so that the grommet pierces 4 layers of media.